


DOUBLE CHARGE

VITRIFIED TILES


BELLISO

VITRIFIED

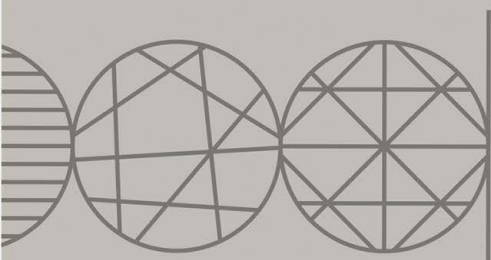

EXPLORE THE
Impressions

6 0 0 x 6 0 0 m m

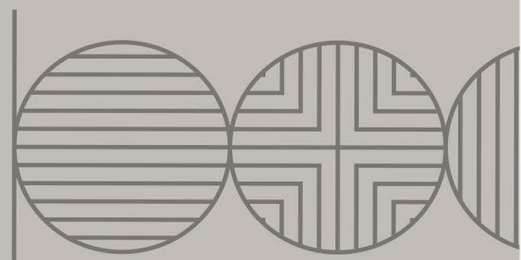

BELLISO

VITRIFIED

About...

I'm synonym of Luxury. In the gated community, I am the most coveted brand. The Tile develops its own luxury of modernism. They have blended traditional and outstanding art of fashion, into an extraordinary tile. That's me.

Try, test and triumph on Luxury. Alone I out smart; together stand with brilliance and in a community omnipresent. Feel good effect, tones and versions inspire variations in romance. Believe me, I behold ever lasting – ever shining – ever charming Luxury.





**DOUBLE
CHARGE**
VITRIFIED TILES



FLOOR




RESIDENTIAL



COMMERCIAL
RETAIL SPACE




OFFICES




AMAZE SNOW WHITE

(PLAIN WHITE)

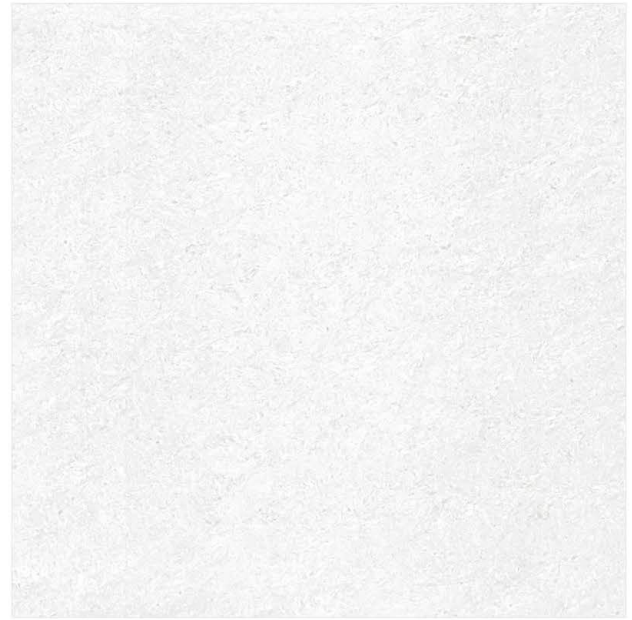

AMAZE WHITE (L)

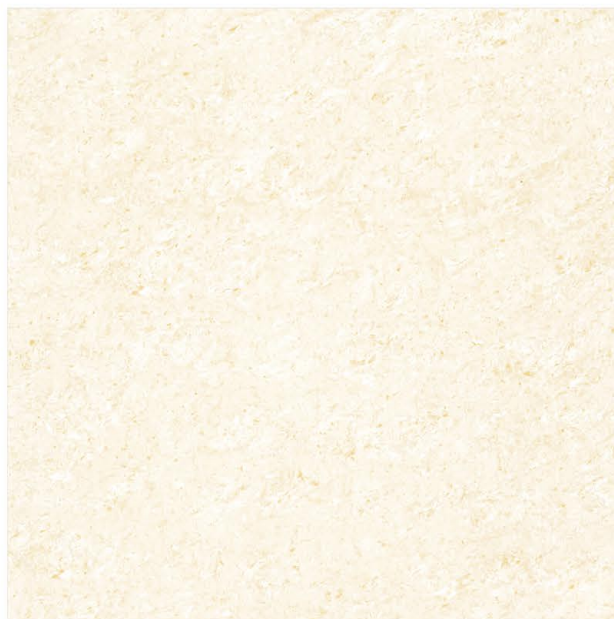

AMAZE GOLD (L)





AMAZE BEIGE (L)



AMAZE ROSE (L)



AMAZE PEACH (L)






AMAZE PISTA (L)




AMAZE ARMANI (L)

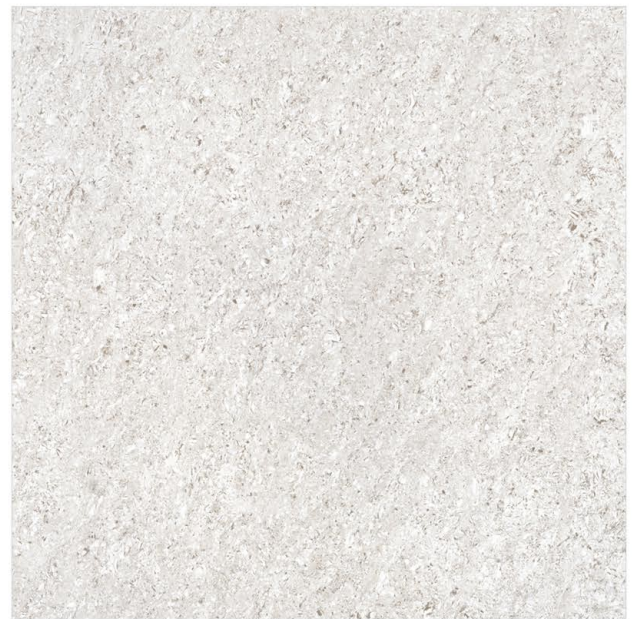

AMAZE AMBER (L)



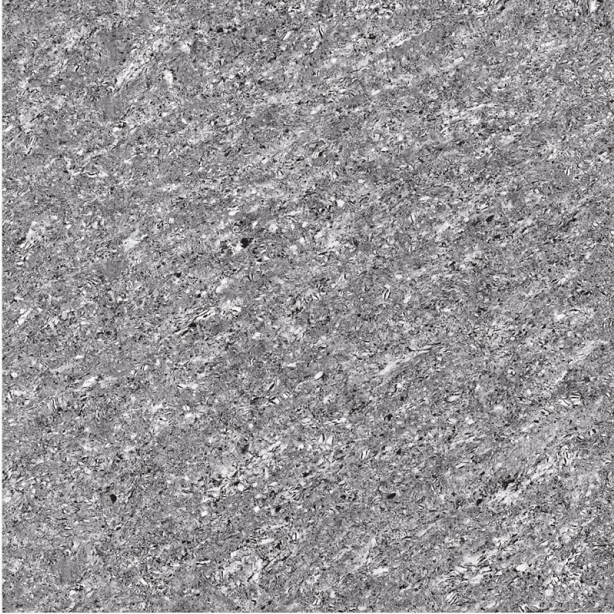

AMAZE GREY (D)




AMAZE CHERRY (D)



AMAZE KHAKHI (D)




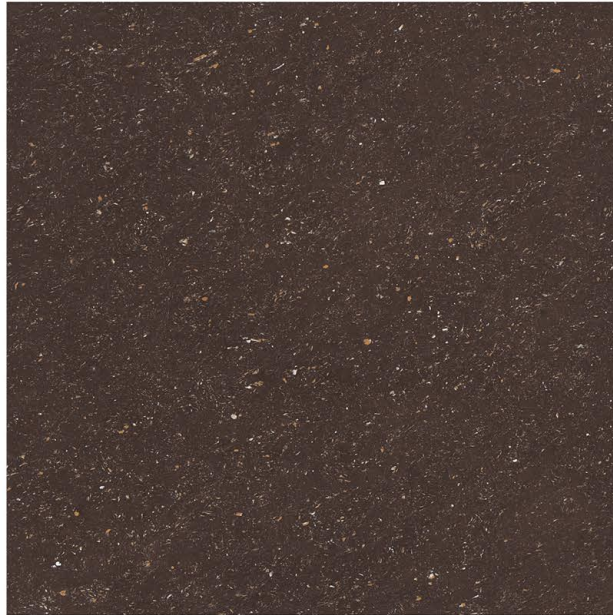

AMAZE CHOCO (D)



AMAZE ALMOND (D)

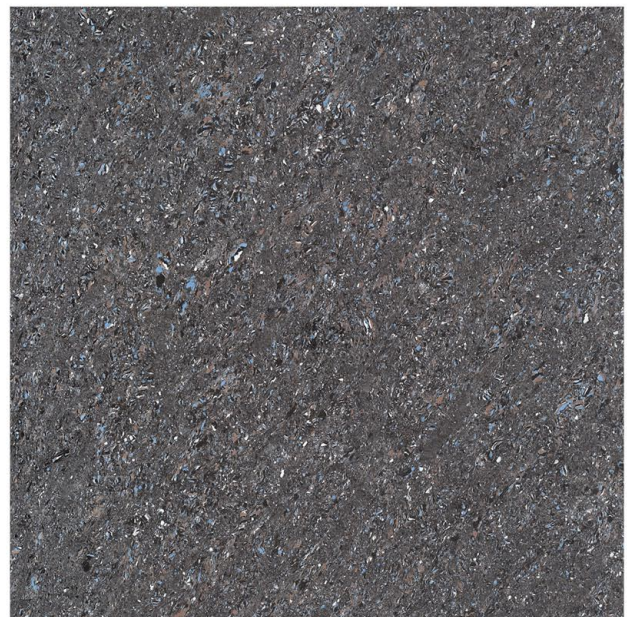

AMAZE SKY BLACK (D)





AMAZE BLACK (D)



AMAZE CHIKU (D)



AMAZE RED (D)



— DOUBLE CHARGE

DYNA series

600x600mm

Let the harmony prevail...

Some spaces are meant to bring accordance all around.
Thus let there be symmetry of style in your life0

BELLISO


VITRIFIED



DYNA WHITE (L)




DYNA BEIGE (L)

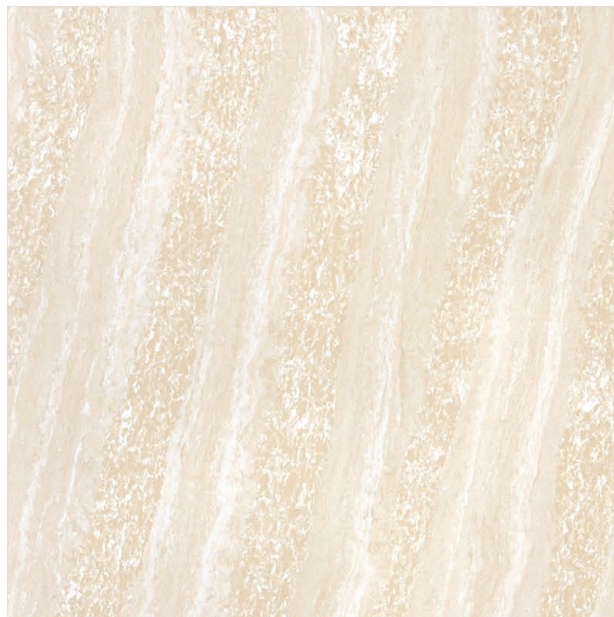


DYNA CREMA (L)




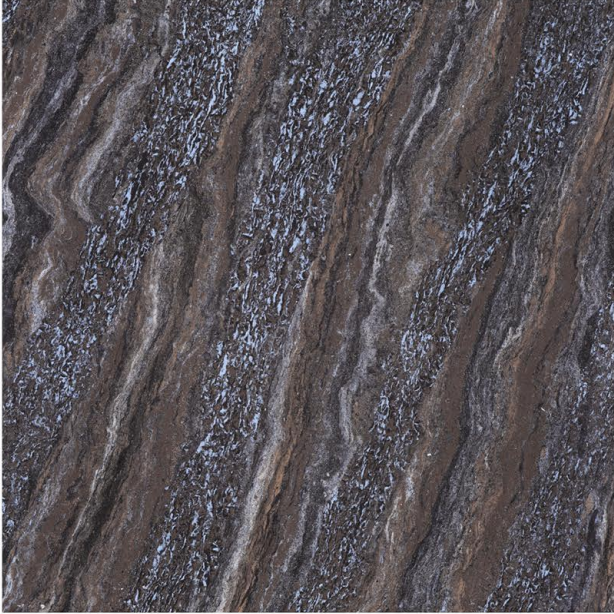

DYNA SKY BLACK (D)

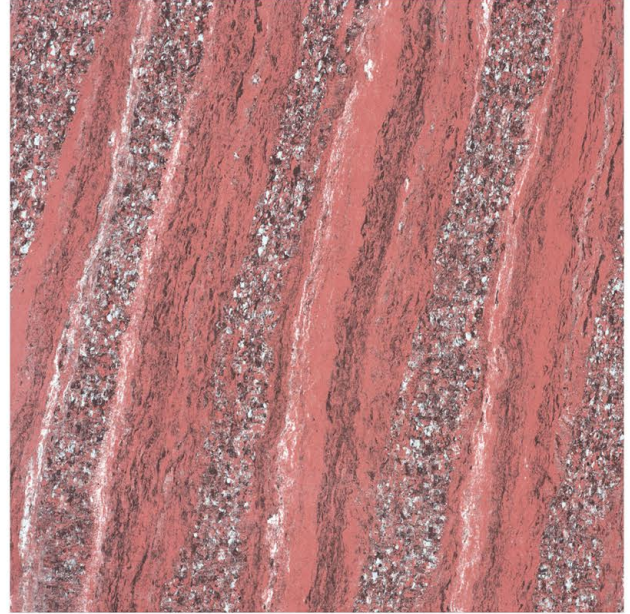

DYNA RED (D)

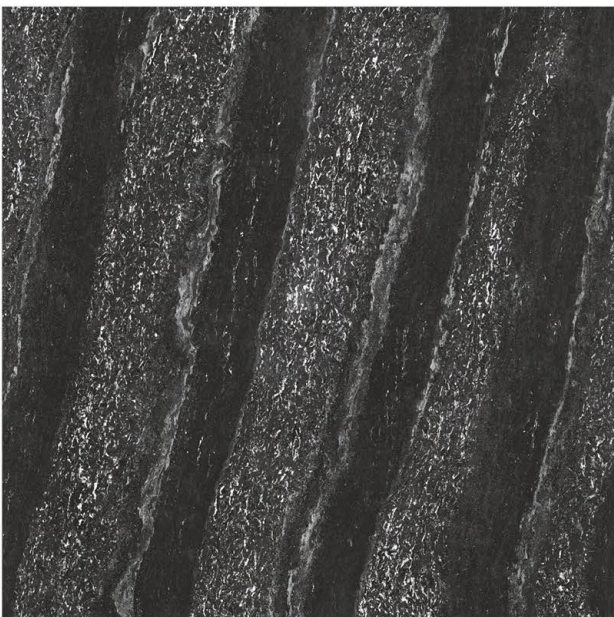

DYNA BLACK (D)



DYNA GREY (D)



— DOUBLE CHARGE

FORTUNEseries

600x600mm

Royalty to the core...

Some spaces are meant to make you feel royal.
Thus let them be as majestic as your own little kingdom.

BELLISO

VITRIFIED



FORTUNE WHITE (L)




FORTUNE CREMA (L)




FORTUNE ARMANI (L)



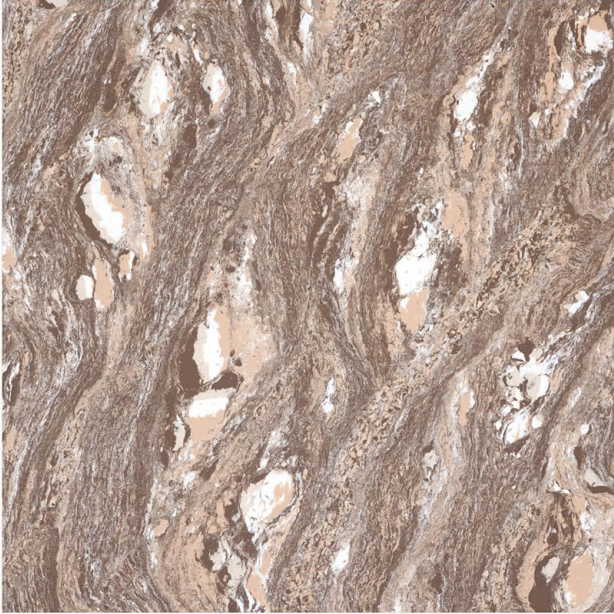


FORTUNE CANVAS (D)

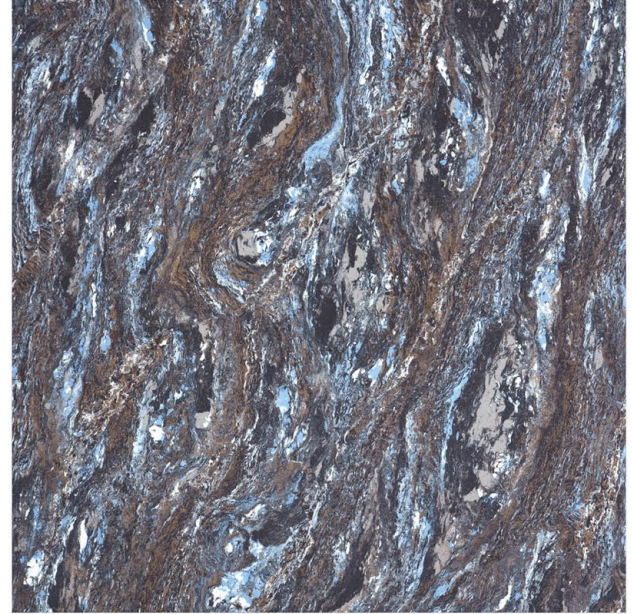

FORTUNE SKY BLACK (D)



FORTUNE BLACK (D)

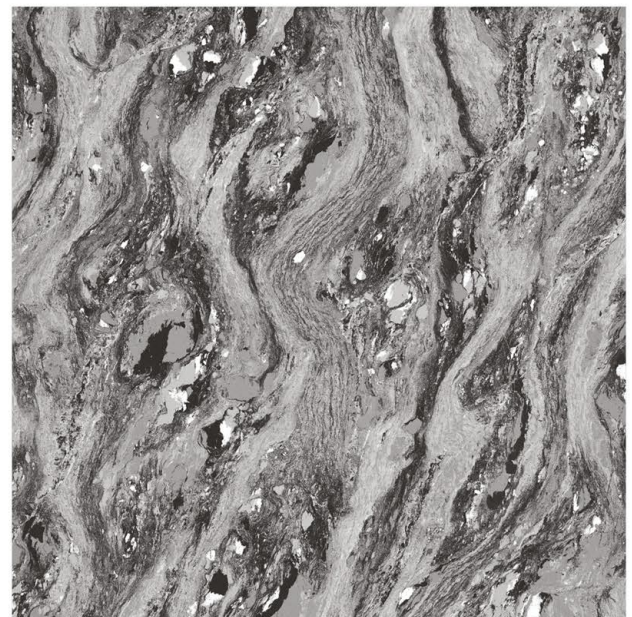

FORTUNE GREY (D)



— DOUBLE CHARGE

PRIME series

600x600mm

Sense the splendour in every sight...

Some spaces are meant to spell class and comfort both together.
Thus let them be as mesmerizing as first ray of sun.

BELLISO


VITRIFIED



PRIME GRAPHITE (L)



PRIME CADBURY (L)

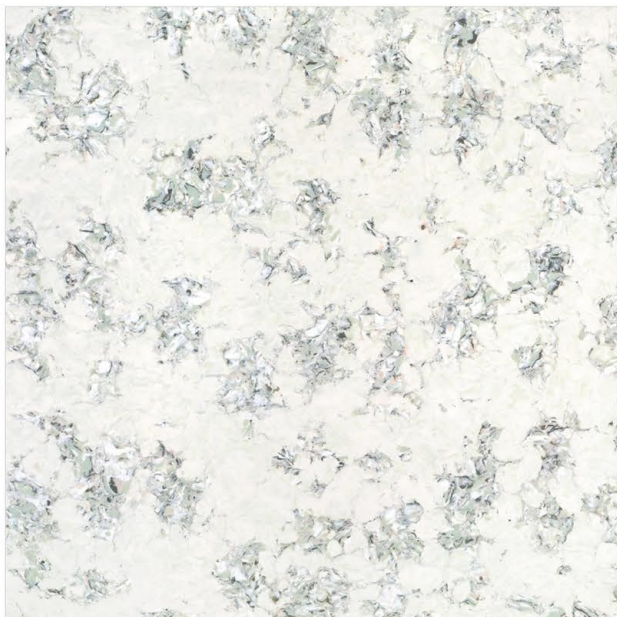


PRIME OLIVE (L)




PRIME BURPHY (L)




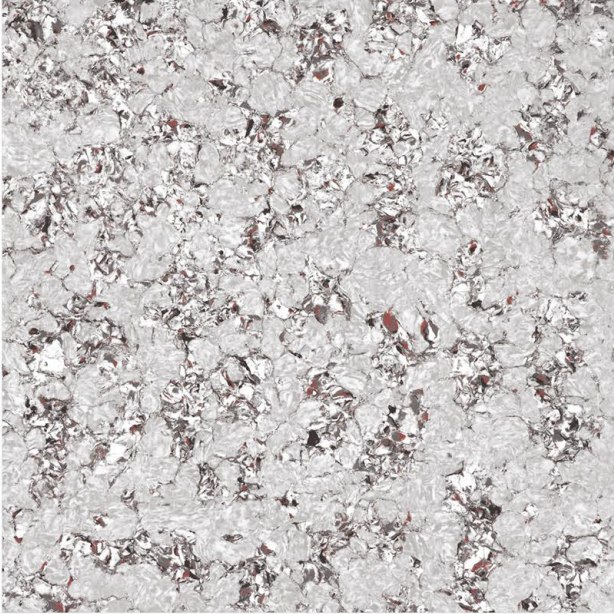

PRIME SMOKE (D)

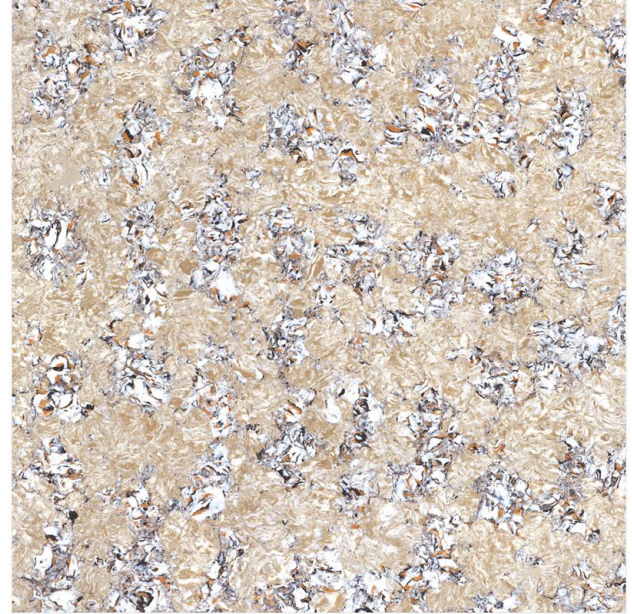

PRIME BRONZE (D)

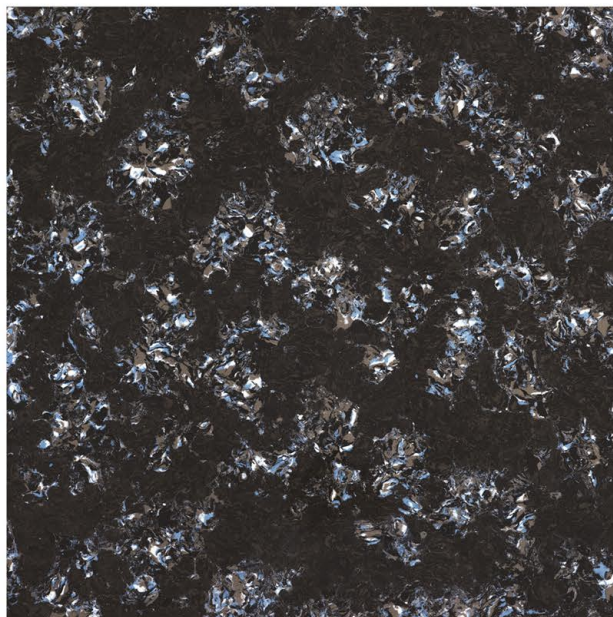

PRIME VELVET (D)



— DOUBLE CHARGE

DUNES series


600x600mm

Sense the splendour in every sight...

Some spaces are meant to spell class and comfort both together.
Thus let them be as mesmerizing as first ray of sun.

BELLISO


VITRIFIED

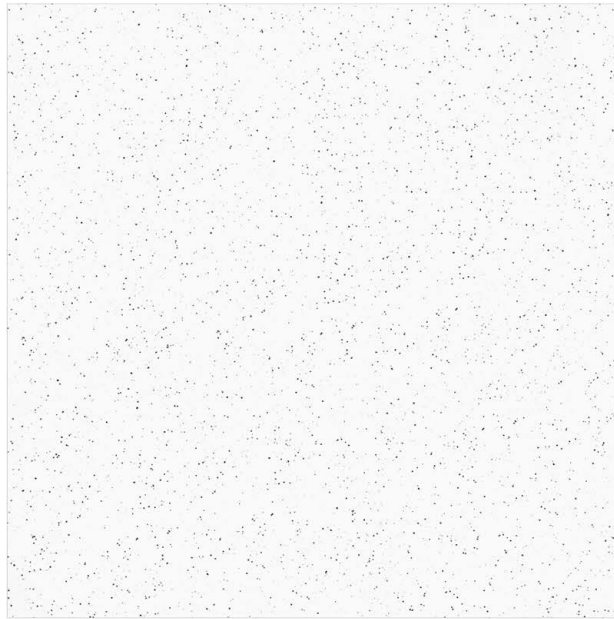

DUNES SUPER WHITE



DUNES WHITE (L)

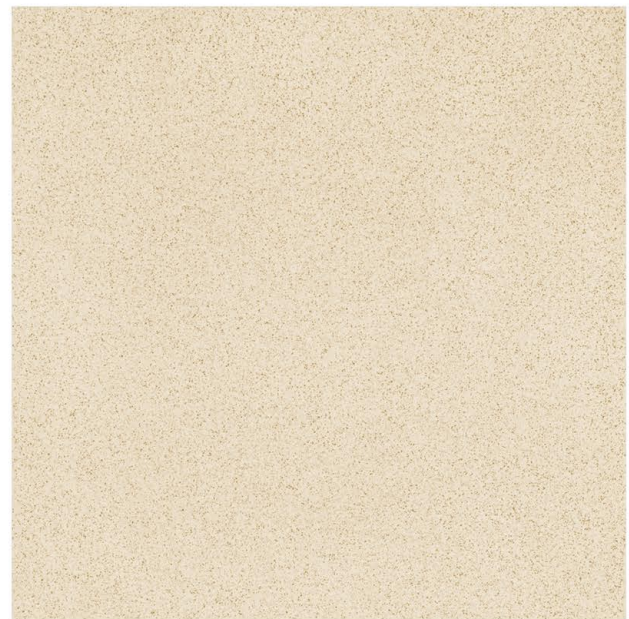


DUNES CREMA (L)






DUNES GREY (D)

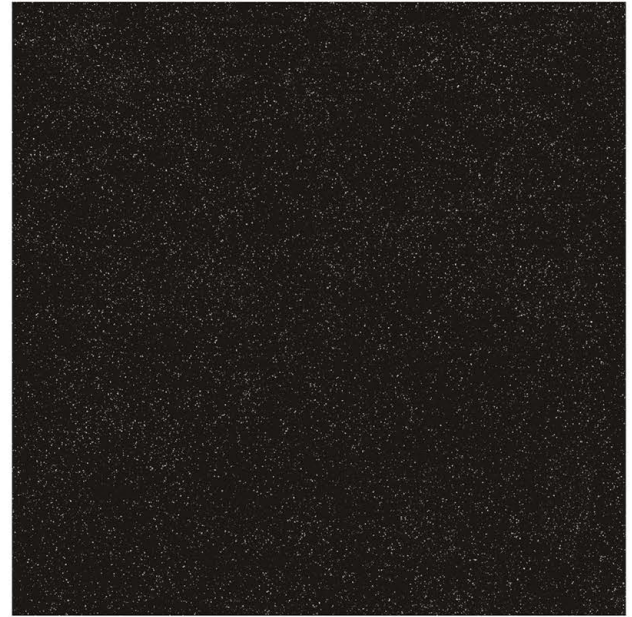

DUNES BLACK (D)



DUNES JAISALMER (D)

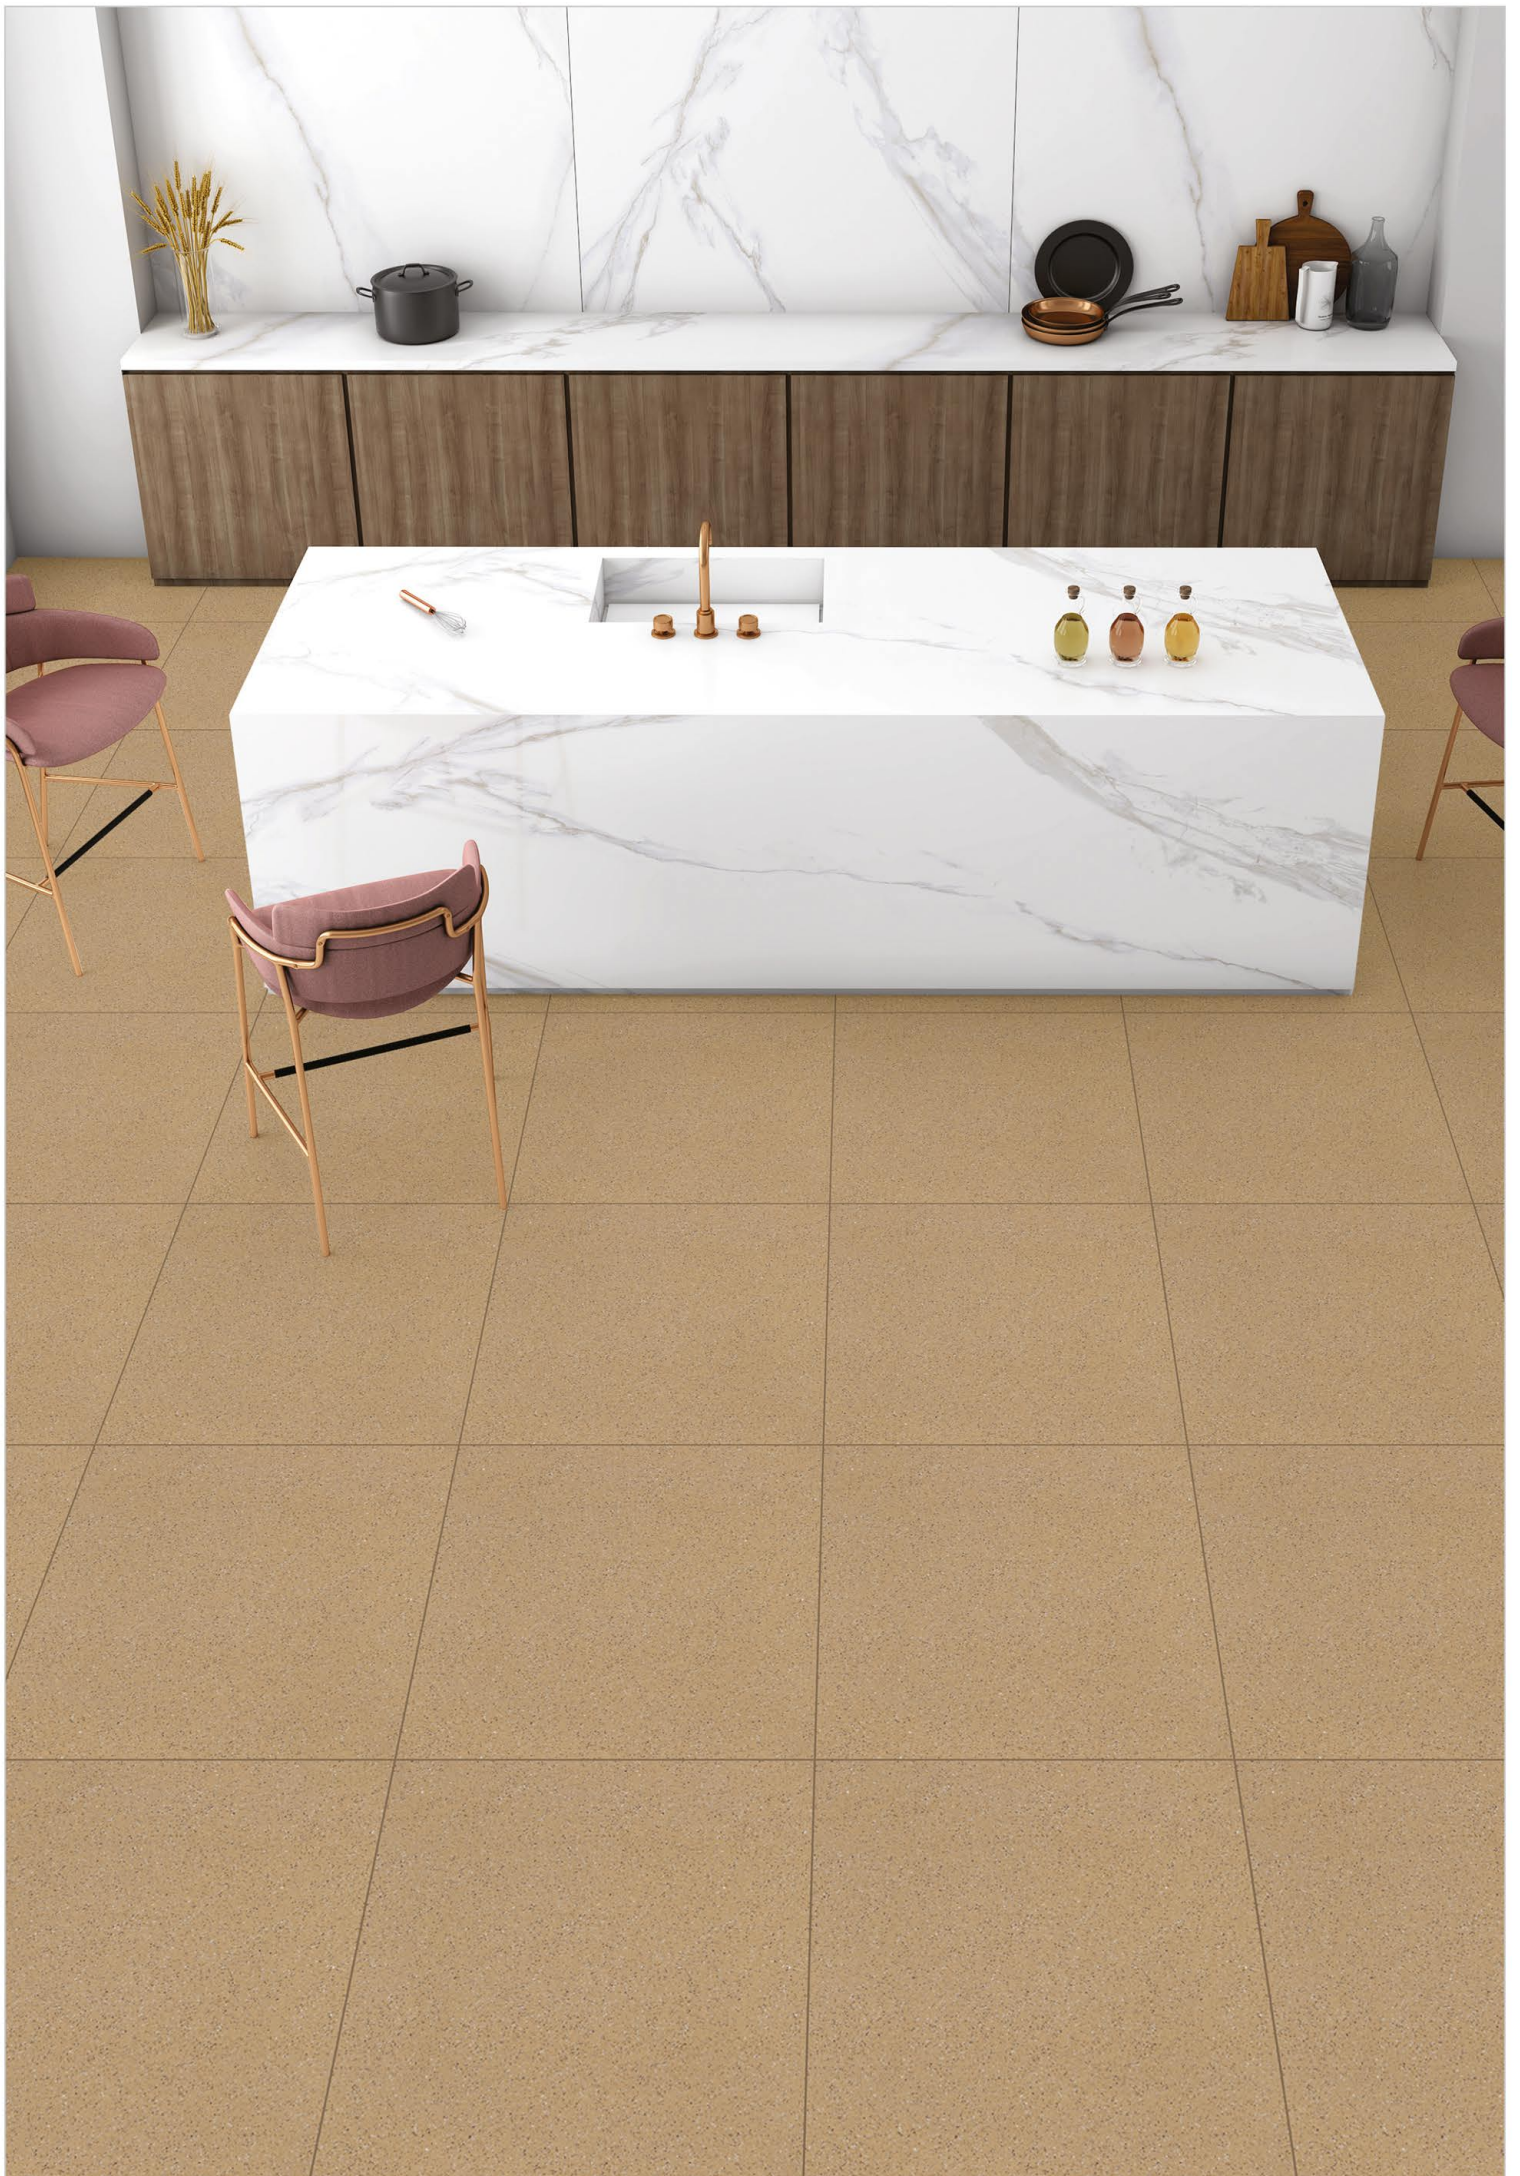



LAYING INSTRUCTION

- Prepare base mortar with cement and sand in the ratio 1:4.
- Set the levels for floor (i.e. dead level or slope as specified by the Architect / Contractor).
- Prepare cement slurry i.e. mixture of cement and water to form a thick paste and spread it on the leveled base mortar.
- Wet the back side of the tile with water. Complete immersion of water is not required.
- If tiles are square or rectangular in shape, set the right angles for the area and place the first tile along the right angle lines and place it on base mortar. Tap gently only with a rubber or wooden mallet to obtain perfect levels.
- Clean the surface of the tile with clean water immediately after laying with wet sponge. Ensure the base mortar cement which squeezes through the joints does not settle on the tile. Also ensure that the water used is not hard or brackish.
- Do not use the area laid for at least 24 hours.
- Fill in the joints with pointing material which is a mixture of white cement and desired color pigment. For higher quality of finishes, You could use, if required, a polymer based cementitious tilling joint filler like Roffe rainbow. To get the desired color/shade, mix the same with water to form a smooth paste which should be applied to the joints, preferably with the use of rubber squeeze or rubber sheet. Do not apply the pointing material all over the surface.
- Allow pointing material to set for 15 minutes and then clean the surface of the tile with a clean wet sponge, removing the excess pigment on the tile surface.
- Wash the surface with soap water or mild detergent to obtain a clean surface and wipe it

TECHNICAL SPECIFICATION

	CHARACTERISTIC	STANDARD AS PER ISO-13006/ EN14411 GROUP BIa	MAIN VALUE OF BELLISO DOUBLE CHARGE VITRIFIED TILES	TEST METHOD
Regulatory Properties	Deviation In Length & Width	± 0.50%	± 0.10%	ISO-10545-2
	Deviation In Thickness	± 5.00%	± 2.00%	ISO-10545-2
	Straightness of Sides	± 0.50%	± 0.10%	ISO-10545-2
	Rectangularity	± 0.50%	± 0.10%	ISO-10545-2
	Surface Flatness	± 0.50%	± 0.10%	ISO-10545-2
	Color Differences	Unaltered	No Change	ISO-10545-16
	Glossiness	As per Manufacture	Min.90 %*	Glossometer
	Surface Quality	Min.95% tiles should be free from visible defect	Conforms	ISO 10545-2
Structural Properties	Water Absorption	≤ 0.50 %	E ≤ 0.50%	ISO 10545-3
	Apparent Density	> 2.00 gm/cc	> 2.28 gm/cc	DIN 51082
Massive Mechanical Properties	Flexural Modulus Of Rupture	Min. 35N/mm ²	Min. 40N/mm ²	ISO-10545-4
	Flexural Breaking Strength	Min. 1300 N	Min. 2000 N	ISO-10545-4
	Impact Resistance	As Per Manufacturer	Min. 0.55	ISO-10545-5
Surface Mechanical Properties	Deep Abrasion Resistance	Max. 175mm ³	Max. 132mm ³	ISO-10545-6
	Moh's Hardnes	Min. 6	≥ 6 *	EN101
Thermo Hygrometric Properties	Frost Resistance	No. Damage	Frost Proof	ISO -10545-12
	Thermal Shock Resistance	No. Damage	No. Damage	ISO -10545-9
	Moisture Expansion	Declared Value	Nil	ISO -10545-10
	Thermal Expansion	Max.9.0 X 10 ⁻⁶	Max. 6.5 X 10 ⁻⁶	ISO -10545-8
Chemical Properties	Resistance of House Hold Chemical	No. Damage	No. Damage*	ISO -10545-13
	Stain Resistance	Resistance	Resistance*	ISO -10545-14
Safety Properties	Slip Resistance(friction Co Efficient)	>0.40	>0.40	ISO -10545-17

* Glossiness 90 % with Nano Technology, * With Nano Technology, * Except Hydrofluoric Acid & it's compound, * For Unpolished Vitrified Tile

PACKING DETAIL

Sr.No.	SIZE	NO. OF TILES PER BOX	COVERAGE AREA
01	600x600mm	4 Pic.	1.44 Sq.Mtr.

Note: Color Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserve the right to change the specifications without prior notice. Sometime variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



VITRIFIED

BELLISO VITRIFIED

📍 Sur. No. 77/1/1. Halwad Highway,
Uchi Mandal. Ta. & Dist. Morbi. 363 642

☎ +91 9512860001 , +91 9512860002

✉ bellisovitrified@gmail.com